

# FLEXIBLE COPPER CONNECTIONS

## Copper Flexible Connectors

### FLAT BRAIDED COPPER CONNECTORS

Pressed either as single or as multiple tapes superimposed

- With tinned and bored ends
- With copper tubes or solderless terminals
- Shaped to its installation necessities
- Insulation from: PVC - jacket
- Shrink down plastic tubing or thermal protective insulation
- Supplied from 250 to 4000 Amps



#### Ordering Information:

When ordering flat flexible braids, please supply the following information:

Cross-sectional area of braid

Single wire diameter


W – Width

T – Thickness

OL – Overall Length

L – Length Between Hole Centres

D – Hole Diameter

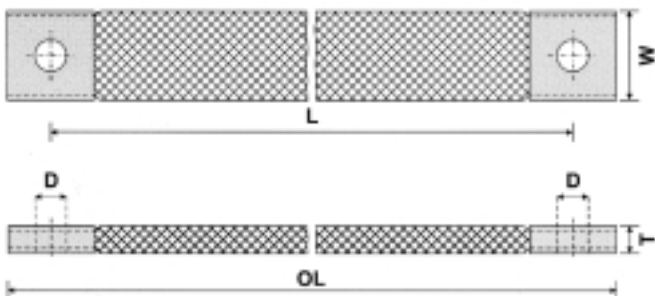

### ROUND STRANDED COPPER CONNECTORS

Highly flexible

- Flat shaped pressed tubes
- Ends tinned or spot welded
- Terminals - Solder or Solderless
- Flag Terminals
- Insulation from: PVC
- Shrink down plastic tubing or thermal protective sleeving



#### Ordering Information:

When ordering round stranded copper connectors, please supply the following information:

Cross-sectional area of braid

Single wire diameter

W – Width

T – Thickness

OL – Overall Length

L – Length Between Hole Centres

D – Hole Diameter

DI – Diameter of Cable

